Critical manufacturing
an ASM PT company

Tutorial: Packing Process

12.0.2

November 2026

DOCUMENT ACCESS

Public

DISCLAIMER

The contents of this document are under copyright of Critical Manufacturing S.A. it is released on condition that it shall not be copied in whole, in part or otherwise reproduced (whether by photographic, or any other method) and the contents therefore shall not be divulged to any person other than that of the addressee (save to other authorized offices of his organization having need to know such contents, for the purpose for which disclosure is made) without prior written consent of submitting company.

Tutorial: Packing Process

Copy Page

Estimated time to read: 3 minutes

Objective

Learn how to execute the full packing process, including creating containers, adding/removing materials, and finalizing containers for storage or shipment.

Step 0: Validate Preconditions

Before starting the packing process, ensure:


- Feature is enabled:
  - `/SMT/MaterialPacking/IsEnabled = True`
- The packing step has:
  - `IsPacking = True`
- Container product is configured with:
  - `IsPackingContainer = True`
- Materials to be packed:
  - Have a valid Flow Path
  - Are compatible (same product/context where required)

Step 1: Configure Packing Smart Tables

1.1 Configure Packing Context

- Navigate to **Administration > Tables > Smart Tables**
- Open:
  - `SMTMaterialPackingContext`
- Define:
  - Product to be packed (e.g., Board)


- Product to be packed (e.g., Board)
- Container Product (e.g., Packing Box)

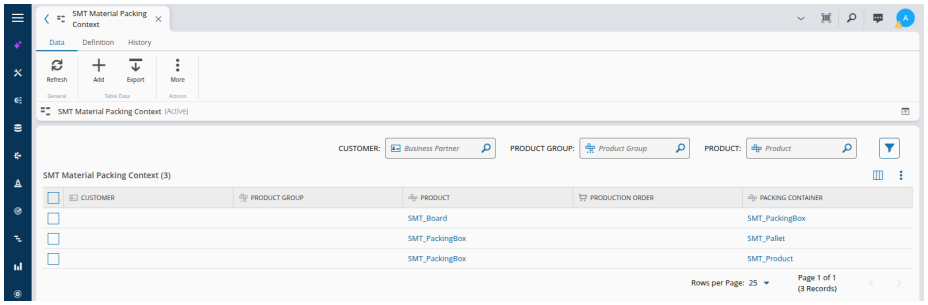

> This defines allowed packing relationships (e.g., Board, then Box, then Pallet)

1.2 Configure Name Generation


- Open:
  - `SMTMaterialNameGenerationContext`
- Configure:
  - Step = Packing Step
  - Form = PackingContainer
  - Name Generator

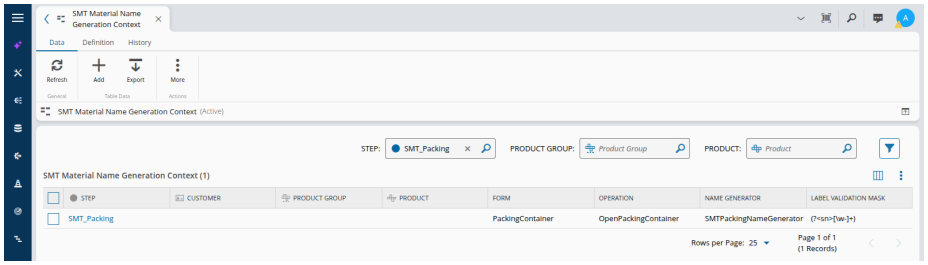

1.3 Configure Labels (Optional)


- Open:
  - `SMTMaterialPrintableDocumentContext`
- Configure labels for:
  - Open Container

- Add Items
- Close Container

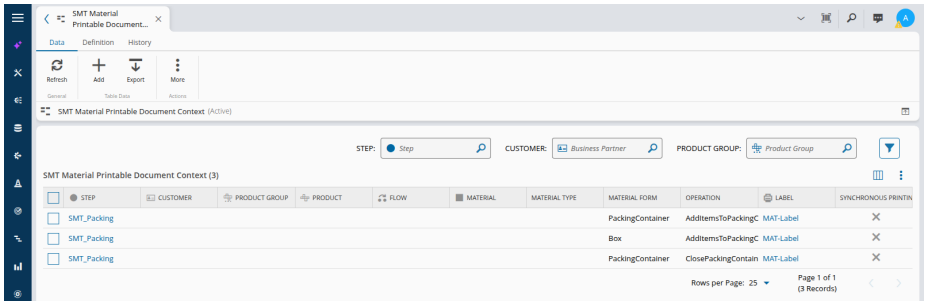


Step 2: Open Packing Container

- Navigate to **Resource View**
- Locate the material(s) to be packed and click **Open Container**

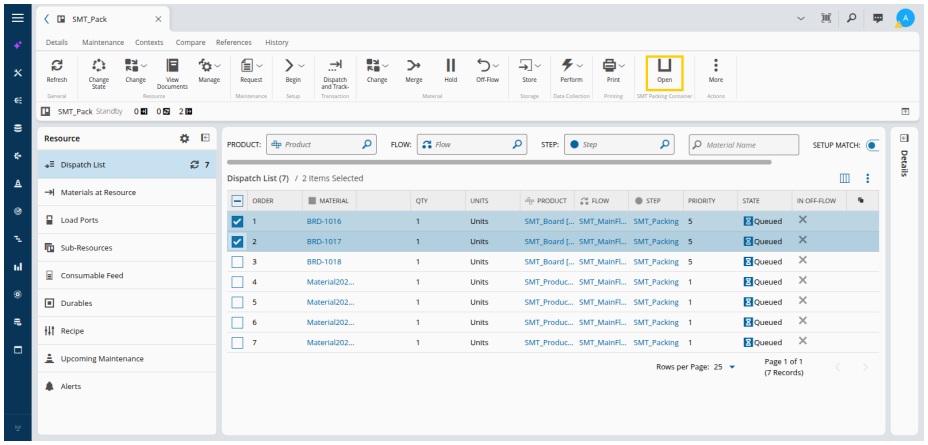

- Confirm the operation in the wizard

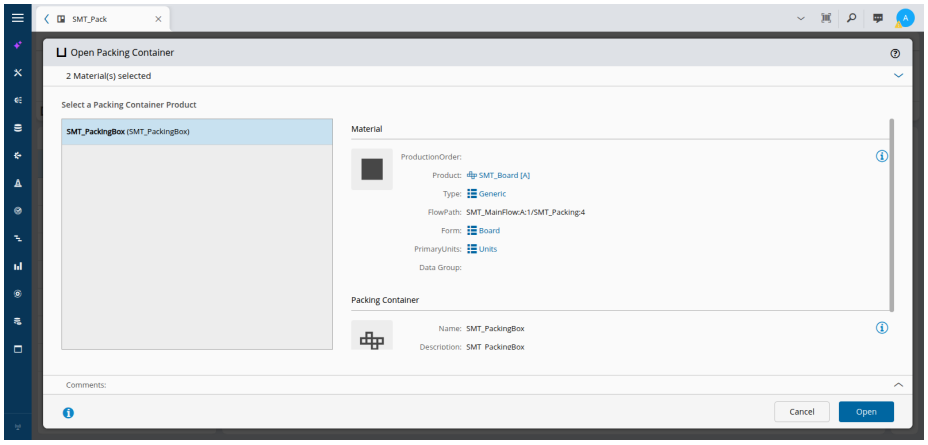


Result


- A **Packing Container Material** is created
- Container state = **Open**
- Container is ready to receive materials

Step 3: Add Items to Container

- In **Resource View**, select the Packing Container and click **Add Items**

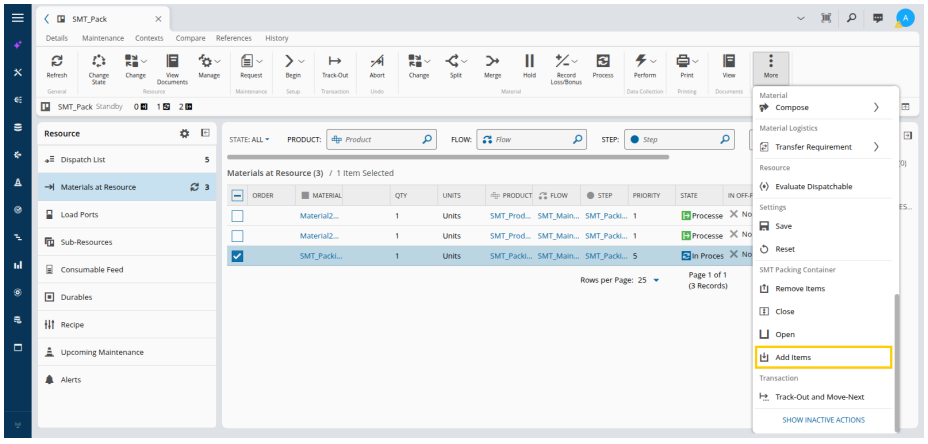

- In the wizard select or scan materials to add and confirm

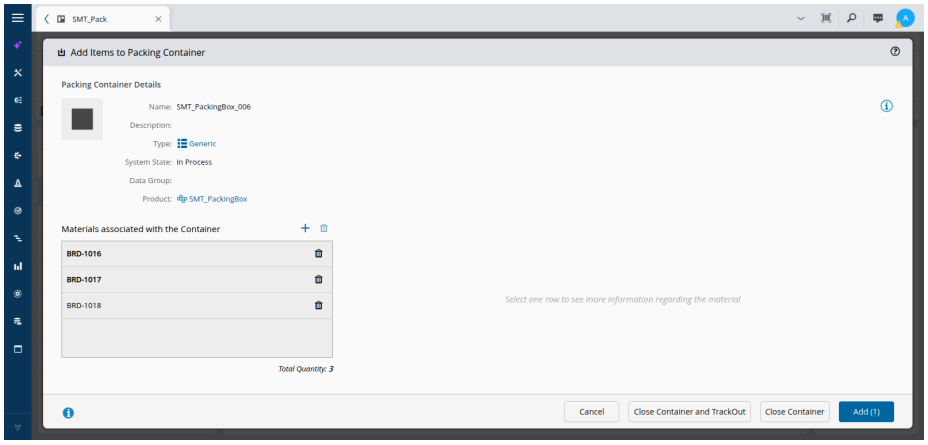


Result


- Materials are added to the container
- Labels may be generated (if configured)
- Container contents are updated

Step 4 (Optional): Remove Items from Container

- Select the Packing Container and click **Remove Items**

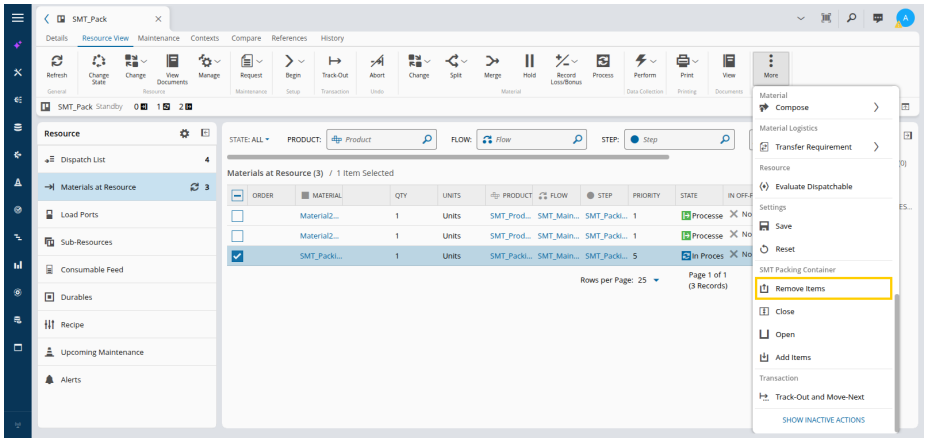

- In the wizard select materials to remove and confirm

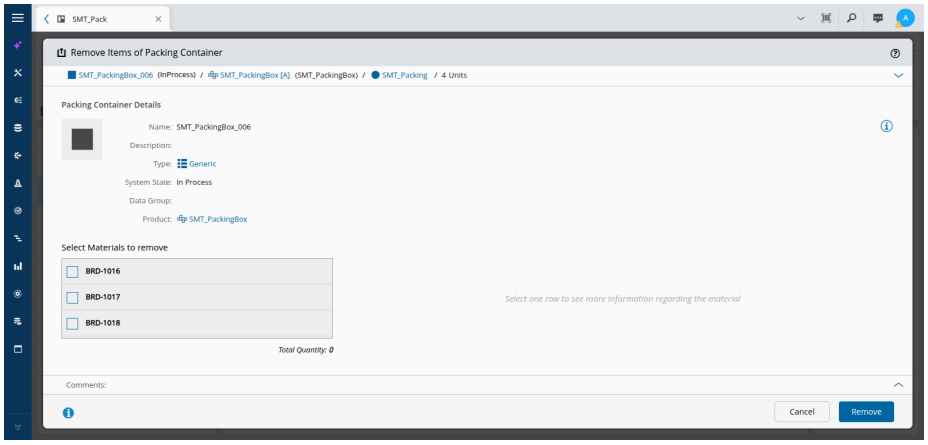


Result


- Selected materials are removed
- Container may return to **Open** state if previously closed
- Materials are available again for packing

Step 5: Close Packing Container

- Select the Packing Container and click **Close**

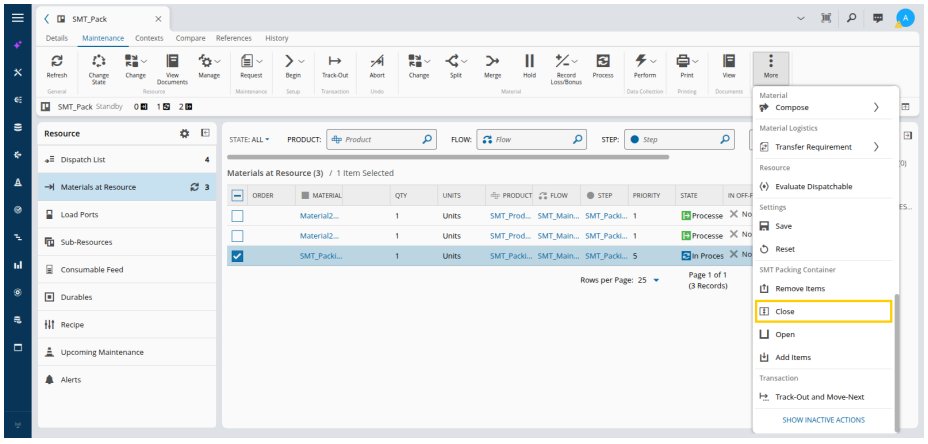

- Review container details in the wizard and click **Close Container** or **Close & TrackOut**

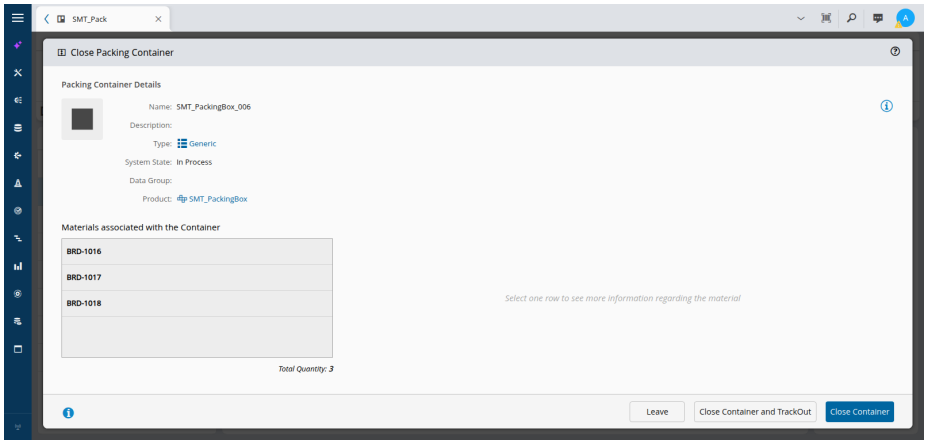

Result

- Container state = **Closed**
- No further changes allowed
- Labels are printed (if configured)
- Container is moved to next step automatically when **Close & TrackOut** is selected

Expected Result

- Materials are grouped into packing containers
- Containers reflect correct hierarchy (e.g., Board, then Box, then Pallet)
- Containers are finalized and ready for:
  - Storage
  - Shipment

Frequent Configuration Questions

Why can't I open a container?

Verify the following:

- The product has the `IsPackingContainer` attribute enabled.

- The packing step is correctly configured.

Why can't I add materials to a container?

Ensure that the materials are compatible with the container according to the defined rules (for example, product, flow, and other applicable criteria). Also validate the `SMTMaterialPackingContext` configuration.

Why can't a container be closed?

Check the container state. Only containers in the **Open** state can be closed.

Why are container labels not being printed?

Validate that the `SMTMaterialPrintableDocumentContext` configuration is correctly set up.

Why is the container behaving unexpectedly?

Review and confirm the Smart Table configurations associated with the packing process.

Why did the container become empty?

The system may automatically terminate the container when all packed materials have been removed. This is expected behavior.

Legal Information

Disclaimer

The information contained in this document represents the current view of Critical Manufacturing on the issues discussed as of the date of publication. Because Critical Manufacturing must respond to changing market conditions, it should not be interpreted to be a commitment on the part of Critical Manufacturing, and Critical Manufacturing cannot guarantee the accuracy of any information presented after the date of publication. This document is for informational purposes only.

Critical Manufacturing makes no warranties, express, implied or statutory, as to the information herein contained.

Confidentiality Notice

All materials and information included herein are being provided by Critical Manufacturing to its Customer solely for Customer internal use for its business purposes. Critical Manufacturing retains all rights, titles, interests in and copyrights to the materials and information herein. The materials and information contained herein constitute confidential information of Critical Manufacturing and the Customer must not disclose or transfer by any means any of these materials or information, whether total or partial, to any third party without the prior explicit consent by Critical Manufacturing.

Copyright Information

All title and copyrights in and to the Software (including but not limited to any source code, binaries, designs, specifications, models, documents, layouts, images, photographs, animations, video, audio, music, text incorporated into the Software), the accompanying printed materials, and any copies of the Software, and any trademarks or service marks of Critical Manufacturing are owned by Critical Manufacturing unless explicitly stated otherwise. All title and intellectual property rights in and to the content that may be accessed through use of the Software is the property of the respective content owner and is protected by applicable copyright or other intellectual property laws and treaties.

Trademark Information

Critical Manufacturing is a registered trademark of Critical Manufacturing.

All other trademarks are property of their respective owners.

Copyright © 2023 Critical Manufacturing. All rights reserved.